MT 1440 TIER IV

MT SERIES PREMIERE CONSTRUCTION telescopic handler







MT 1440 SERIES PREMIERE CONSTRUCTION TELESCOPIC HANDLER SPECIFICATIONS

		MT 1440
KEY PERFORMANCE	Lift Capacity (kg)	9,000 lbs. (4082)
	Maximum Lift Height (m)	44'4" (13.53 m)
	Capacity at Maximum Lift Height with Stabilizers (kg)	7,000 lbs. (3175)
	Maximum Forward Reach (m)	31'0" (9.46 m)
	Capacity at Maximum Forward Reach with Stabilizers (kg)	3,000 lbs. (1361)
	Break-out Force with Bucket (daN)	16,636 lb/f (7,400)
ENGINE	Manufacturer	Perkins
	Aspiration	Turbocharged
	Power (kW) @ rpm	100 hp (75) @ 2500
	Model	854F E34TA Tier IV
	Maximum Torque (Nm) @ 1400 rpm	317 ftlbs. (430)
COMPONENTS	Transmission	Powershuttle, 4 Wheel Drive
	Maximum Travel Speed (km/hr)	21.7 mph (35)
	Selective Steering	2-Wheel, 4-Wheel, Crab
	Service Brake	Multiple disc brakes, hydraulic front and rear axles
	Parking Brake	Automatic & Manual
HYDRAULIC SYSTEM	Pump Type	Dual Gear
	Total Capacity (L/min)	45 gpm (170)
	System Pressure (bar)	3916 psi (270)
GENERAL SPECIFICATIONS	A. Front Wheel Center to Carriage (m)	6'2" (1.90)
	B. Wheelbase (m)	10'0" (3.07)
	C. Rear Wheel Center to Rear Face (m)	3'9" (1.16)
	D. Length - Without Forks (m)	20'2" (6.13)
	E. Ground Clearance (mm)	14.4" (367)
	F. Overall Width of Cab (m)	35" (0.89)
	H. Overall Width (to Outside of Tires) (m)	7'9" (2.37)
	I. Overall Width (Stabilizers Lowered) (m)	12'6" (3.79)
	J. Overall Height (m)	8'1" (2.45)
	Approximate Weight (kg)	23,931 lbs. (10,855)
	Outside Turning Radius (m)	13'1" (3.99)
	Standard Tires	440/80-24
CAPACITIES	Fuel Tank Capacity (L)	37 gal. (140)
	DEF Tank Capacity (L)	3.2 gal. (12)


Machine on Tires with Forks



Machine on Stabilizers with Forks



DIMENSIONS REFERENCE DIAGRAMS

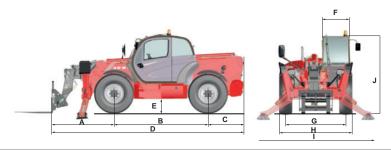



This publication in no way constitutes an offer and the company reserves the right to alter specifications without notice.